


## RF Coaxial Test Sockets [ESD measure]

Concept of this product is:

Giga-bit transmission available

IC test socket considering ESD measure.

Especially, this product is designed to demonstrate excellent performance in high frequency to the utmost taking into consideration of ESD measure.

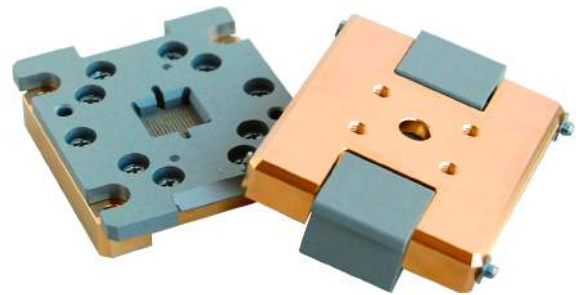

### Specification

Impedance : 50Ω

S11 : -10dB : 22.5GHz

S21 : -1dB : 22.5GHz

Mutual Capacitance : 0.57pF

Self Inductance : 1.0nH

Rise Time : 99.1ps : 3.35Gbps


Jitter RMS : 5.61ps : 3.35Gbps

Pitch : 0.5mm~

Probe Pin Type : RF/POWER/GROUND


### High frequency characteristic

#### Return loss

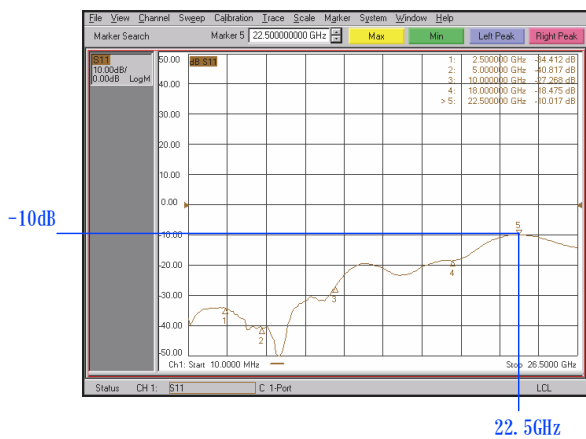

22.5GHz

#### Insertion loss

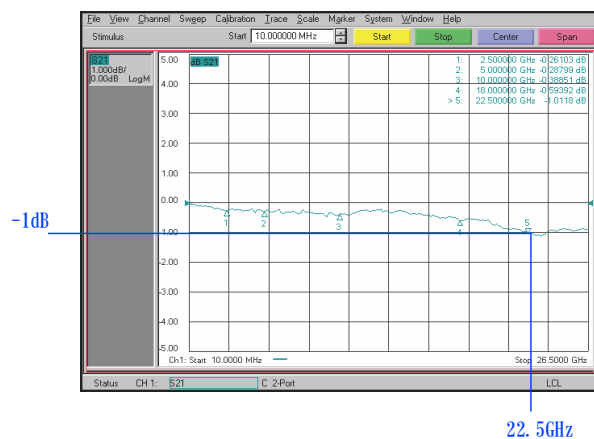

22.5GHz

#### Eye Pattern

