

## 2 Pole Connector with locking feature

- Easy to mate/unmate
- Safety locking

60A

Current rating : 60A  
 Insulation Resistance : DC500V 1000MΩ min  
 Dielectric Strength : AC1500V 1min  
 Temperature Range : -55°C~+125°C




### How to order

**UJRS-□BX2-SD-□□**

P : Plug      Terminal Type  
 S : Socket    blank: Solder Cup  
                  CR : Crimp

### How to use

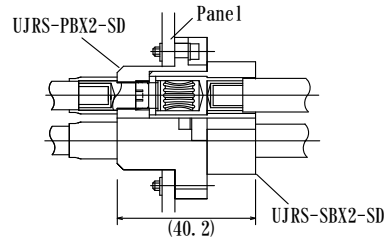


Socket <b>UJRS-SBX2-SD</b>		Plug <b>UJRS-PBX2-SD</b>			
Please consult us about tool.					
Pin type	Socket pin <b>UJCS80-SL275G-SD</b>	Plug pin <b>UJCP80-SL320G-SD</b>			
Soldering					
Gold plating					
Pin type	Socket pin <b>UJCS80-SL295-F450-SD-CR</b>	Plug pin <b>UJCP80-SL340G-F450-SD-CR</b>			
Crimping					
Gold plating					
<table border="1" style="width: 100%;"> <tr> <td style="text-align: center;">Wire</td> </tr> <tr> <td style="text-align: center;"><b>UE/SSX83 LF</b> AWG#8 8mm<sup>2</sup></td> </tr> </table>		Wire	<b>UE/SSX83 LF</b> AWG#8 8mm <sup>2</sup>	○Please consult us about Crimping Tool. ○Total assembly including crimping wire is also welcome.	
Wire					
<b>UE/SSX83 LF</b> AWG#8 8mm <sup>2</sup>					

## 2 Pole Connector with locking feature

- Easy to mate/unmate
- Safety locking

60A

Current rating : 60A  
 Insulation Resistance : DC500V 1000MΩ min  
 Dielectric Strength : AC3000V 1min  
 Temperature Range : -55℃~+125℃

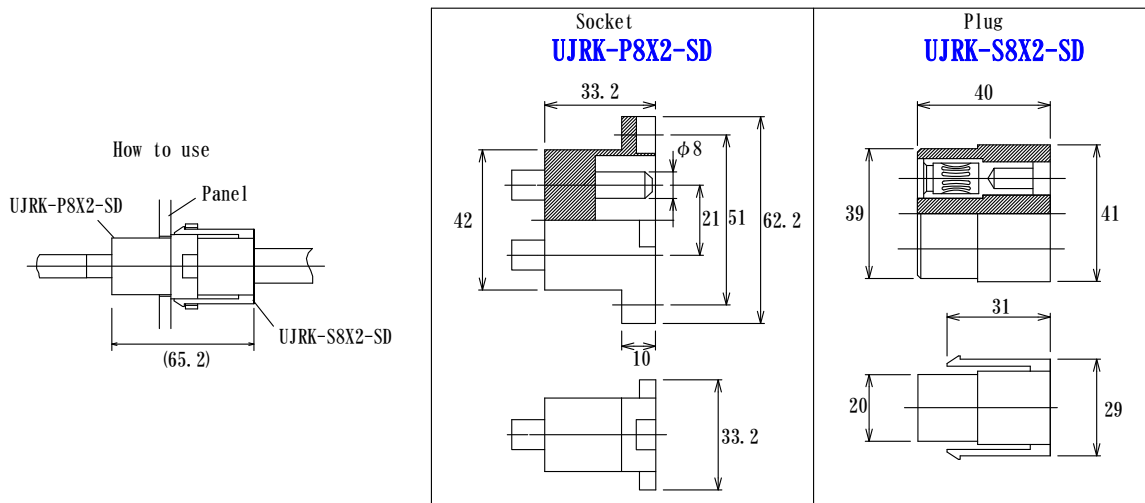

## 4 Pole Connector

Current rating : 67A  
 Operating temperature : -20℃~+100℃  
 Cable : AWG 8

