

2 Pole Connector

High cost effectiveness with injection-molded housing.

Voltage rating AC7.5KV


Injection-molded housing.

Specification

Current rating: 1.5A
Dielectric Strength: AC15KV 1 minute at sea level
Insulation Resistance: DC1000V 100MΩ min
Contact Resistance: 15mΩ max
Temperature range: -10°C ~ +80°C

Material

Insulator : PBT, glass filled, Black
Plug pin : Brass, Gold plating over Ni Plating
Socket pin: Beryllium Copper, Heat treated
Gold Plated over Ni plating
Sleeve: Brass, Gold Plating over Ni plating

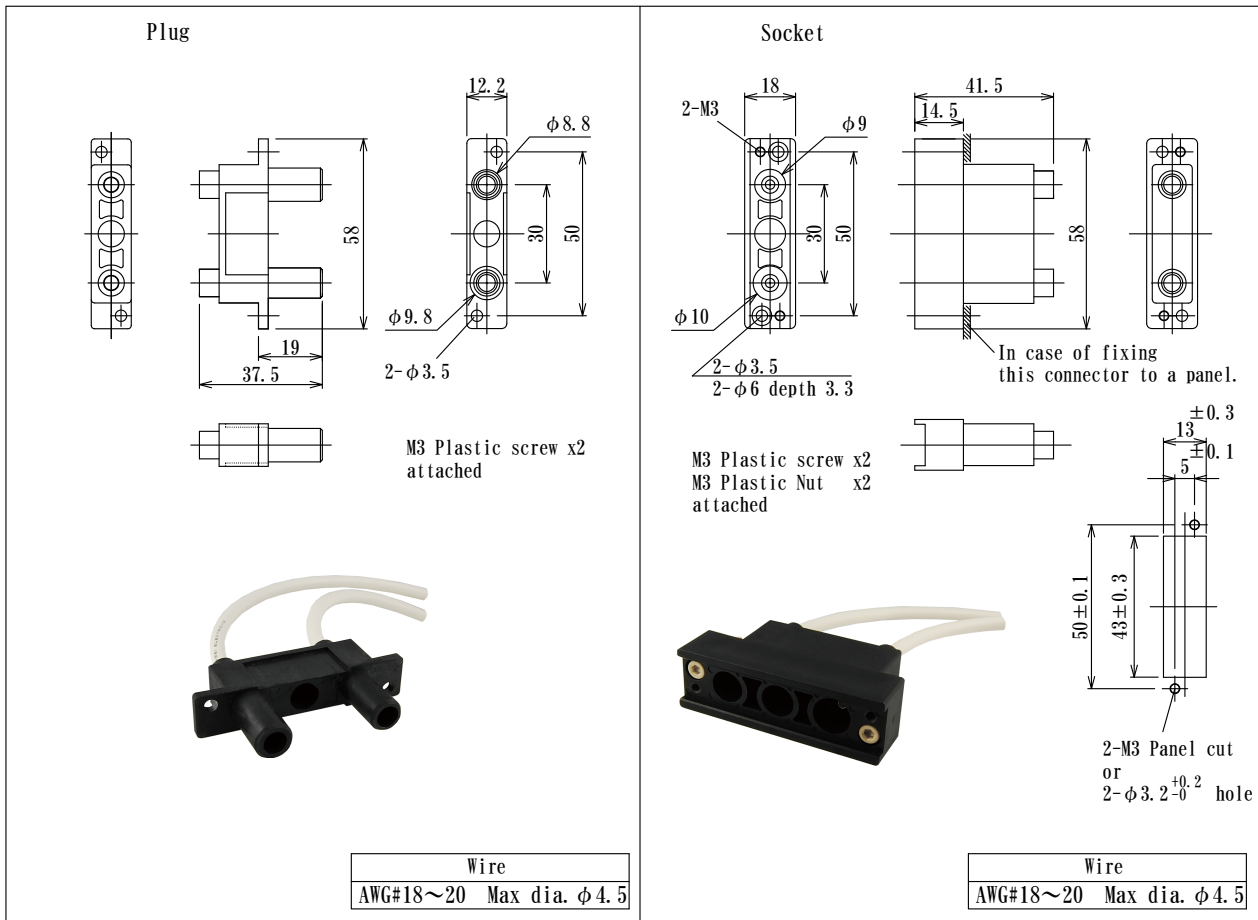

mm

How to order

Please order as cable assemblies.

HAYC-S-2P-15 - □□□□

Length [mm]

Plug : HAYC-P-2P-15
Socket : HAYC-S-2P-15

Figure of mating

