

## 2 Pole Connector with locking feature


DC 5KV or DC 30A

### Specification

Current rating: DC 30A at 25°C  
(In the case of Low Voltage )  
Dielectric Strength: DC 5KV 1 minute at 25°C  
(In the case of Low Current )  
Insulation Resistance: DC1000V 100MΩ min  
Contact Resistance: 3mΩ max  
Temperature range: -10°C~+80°C

### Material

Insulator: PBT, glass filled, Black  
Plug pin: Brass, Phosphor bronze, Gold plating over Ni  
Socket pin  
Louver: Beryllium Copper, Heat treated  
Gold Plating over Ni plating  
Sleeve: Brass, Gold Plating over Ni plating

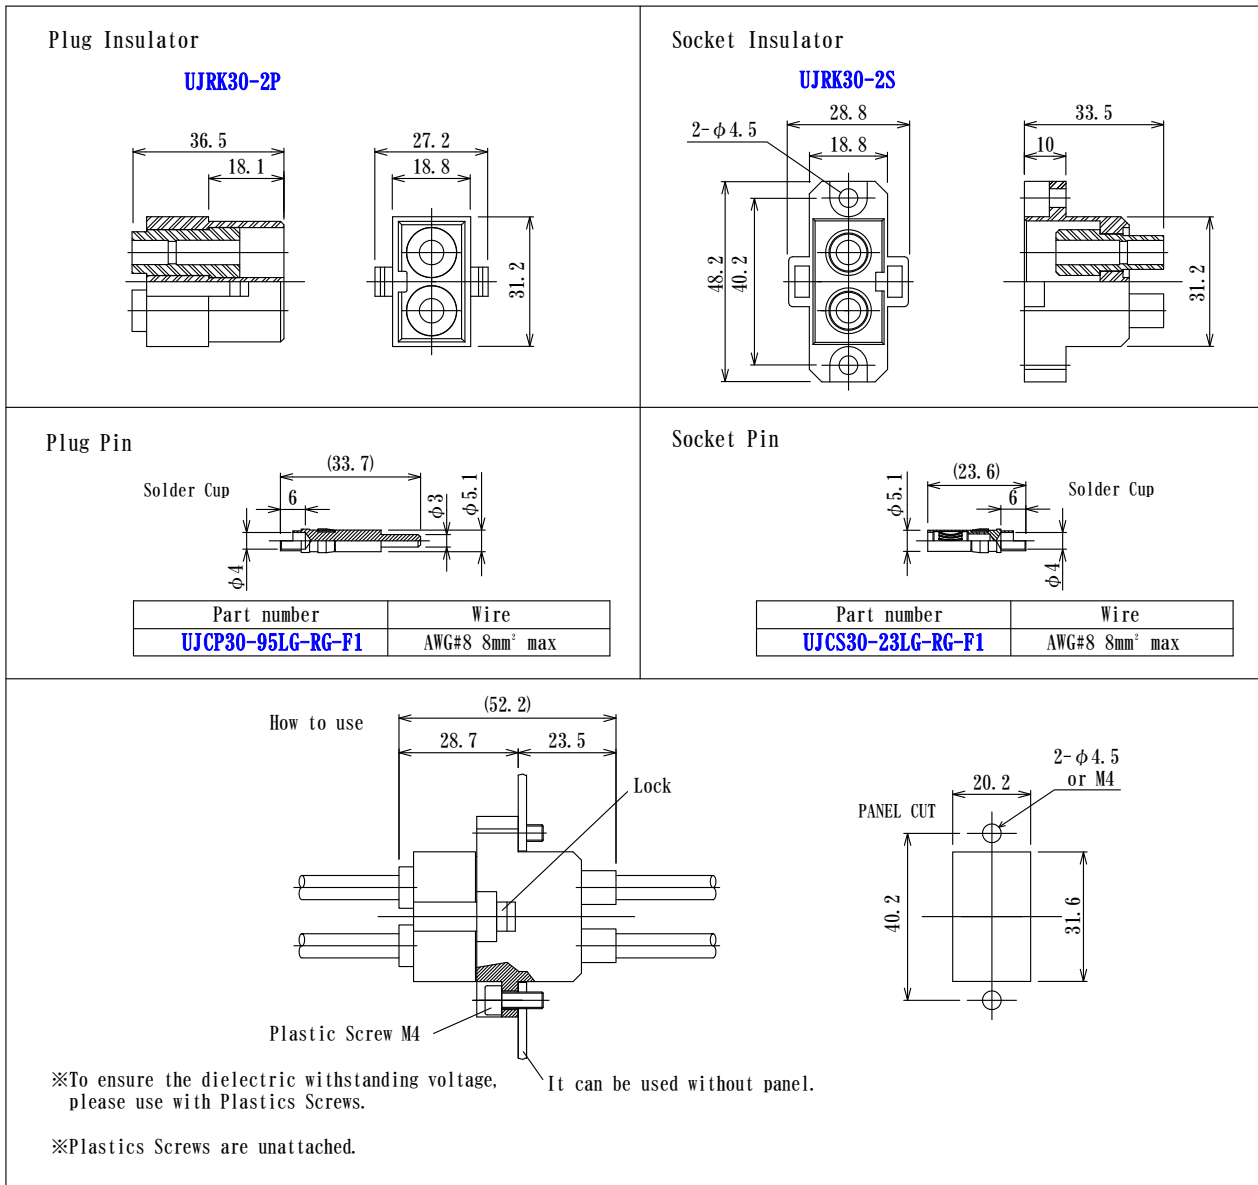

### How to order (example)

**UJRK30-2P** 50pcs  
**UJCP30-95LG-RG-F1** 100pcs  
**UJRK30-2S** 50pcs  
**UJCS30-23LG-RG-F1** 100pcs

- Both pins (socket and plug) are removal with pin removal tool.
- Please consult factory about tools.



We welcome your custom design products.

## 2 Pole Connector with locking feature


DC 5KV or DC 60A

### Specification

Current rating : DC 60A at 25°C  
(In the case of Low Voltage)  
Dielectric Strength : DC 5KV 1 minute at 25°C  
(In the case of Low Current)  
Insulation Resistance : DC1000V 100MΩ min  
Contact Resistance : 3mΩ max  
Temperature range : -10°C~+80°C

### Material

Insulator: PBT, glass filled, Black  
Plug pin: Brass, Phosphor bronze, Gold plating over Ni  
Socket pin  
Louver: Beryllium Copper, Heat treated  
Gold Plating over Ni plating  
Sleeve: Brass, Gold Plating over Ni plating

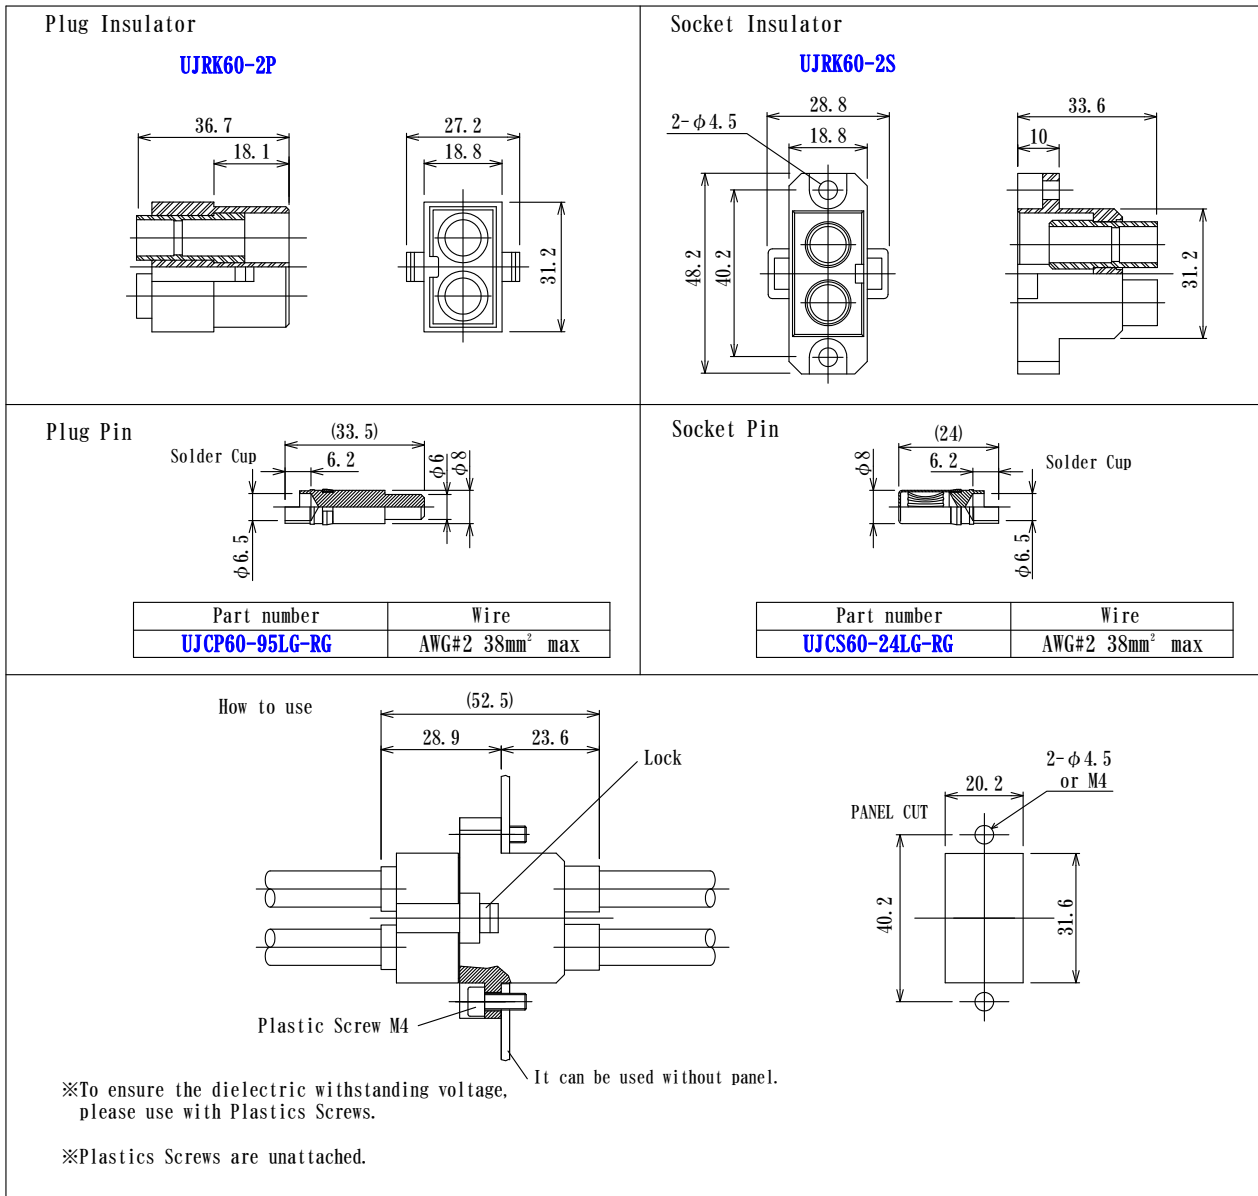

### How to order (example)

**UJRK60-2P** 50pcs  
**UJCP60-95LG-RG** 100pcs  
**UJRK60-2S** 50pcs  
**UJCS60-24LG-RG** 100pcs

- Both pins(socket and plug) are removal with pin removal tool.
- Please consult factory about tools.



We welcome your custom design products.

## 2 Pole 3A Connector with locking feature


DC30KV

### Specification

Current rating: 3A  
Dielectric Strength: DC 30KV 1 minute  
Insulation Resistance: DC1000V 100MΩ min  
Contact Resistance: 3mΩ max  
Temperature range: -10°C~+80°C

### Material

Insulator: PBT, glass filled, Black  
Plug pin: Brass, Phosphor bronze, Gold plating over Ni  
Socket pin  
Louver: Beryllium Copper, Heat treated  
Gold Plated over Ni plating  
Sleeve: Brass, Gold Plating over Ni plating

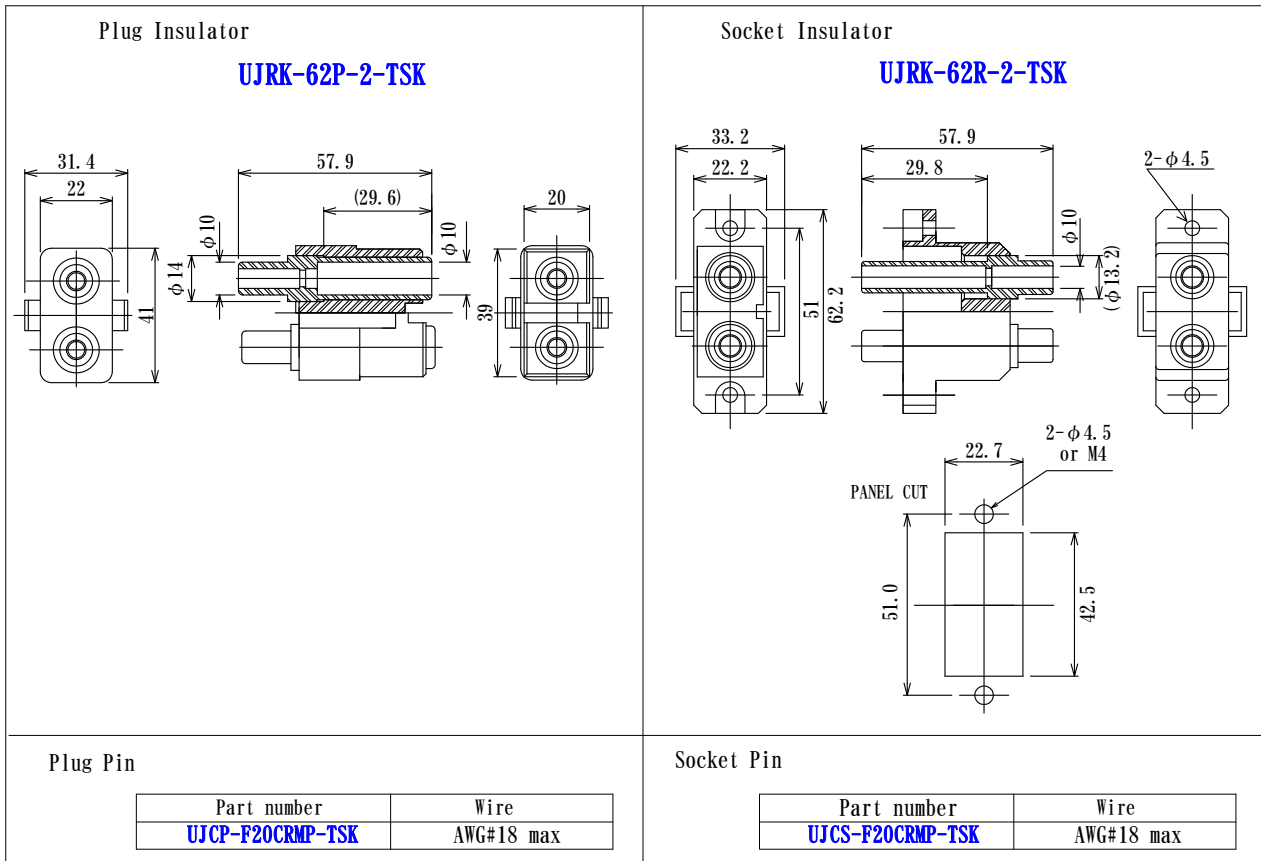

### How to order (example)

**UJRK-62P-2-TSK** 10pcs  
**UJCP-F20CRMP-TSK** 20pcs  
**UJRK-62R-2-TSK** 10pcs  
**UJCS-F20CRMP-TSK** 20pcs

- Crimping Tool is needed.
- Both pins(socket and plug) are removal with pin removal tool.
- Please consult factory about tools.

