

3 Pole Connector

AC5KV

Specification

Current rating : 1.5A
Dielectric Strength : AC10kV 1 minute at sea level
Insulation Resistance : DC1000V 100000MΩ min
Contact Resistance : 15mΩ max
Temperature range : -10°C~+80°C

Material

Insulator : Unilate, glass filled, Black
Plug pin : Brass, Gold plating over Ni Plating
Contact : Beryllium Copper, Heat treated
Gold Plated over Ni plating
Sleeve, Brass, Gold Plating over Ni plating

Plug	Socket				
<p style="text-align: center;">accessories Plastic M3 Screw 2 pcs</p>	<p style="text-align: center;">Accessories Plastic M3 Screw Washer Nut 2 pcs each</p>				
<table border="1" style="margin: auto;"> <tr> <td style="text-align: center;">Applicable Cable</td> </tr> <tr> <td style="text-align: center;">AWG#18~20 Outer dia. 4.5 max</td> </tr> </table>	Applicable Cable	AWG#18~20 Outer dia. 4.5 max	<table border="1" style="margin: auto;"> <tr> <td style="text-align: center;">Applicable Cable</td> </tr> <tr> <td style="text-align: center;">AWG#18~20 Outer dia. 4.5 max</td> </tr> </table>	Applicable Cable	AWG#18~20 Outer dia. 4.5 max
Applicable Cable					
AWG#18~20 Outer dia. 4.5 max					
Applicable Cable					
AWG#18~20 Outer dia. 4.5 max					

mm


How to order

HAY-P-3P-10 - □□□□

Connector P/N

Plug : HAY-P-3P-10
Socket : HAY-S-3P-10

Length mm

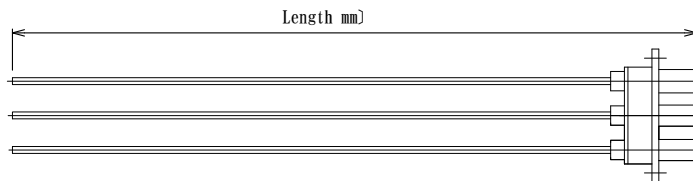

Recommended Cable P/N : **CABLE-3239B**

Size	DWV	temp.	Insulator	Outer dia.	Insulator color, material
AWG20	DC30KV	150°Cmax	1.75mm	4.3mm	White, Silicon

