

3 Pole Connector


AC7.5KV

Specification

Current rating: 1.5A
Dielectric Strength: AC15KV 1 minute at sea level
Insulation Resistance: DC1000V 100MΩ min
Contact Resistance: 15mΩ max
Temperature range: -10°C~+80°C

Material

Insulator : Unilate, glass filled, Black
Plug pin : Brass, Gold plating over Ni Plating
Socket pin: Beryllium Copper, Heat treated
Gold Plated over Nickel plating
Sleeve: Brass, Gold Plating over Ni plating

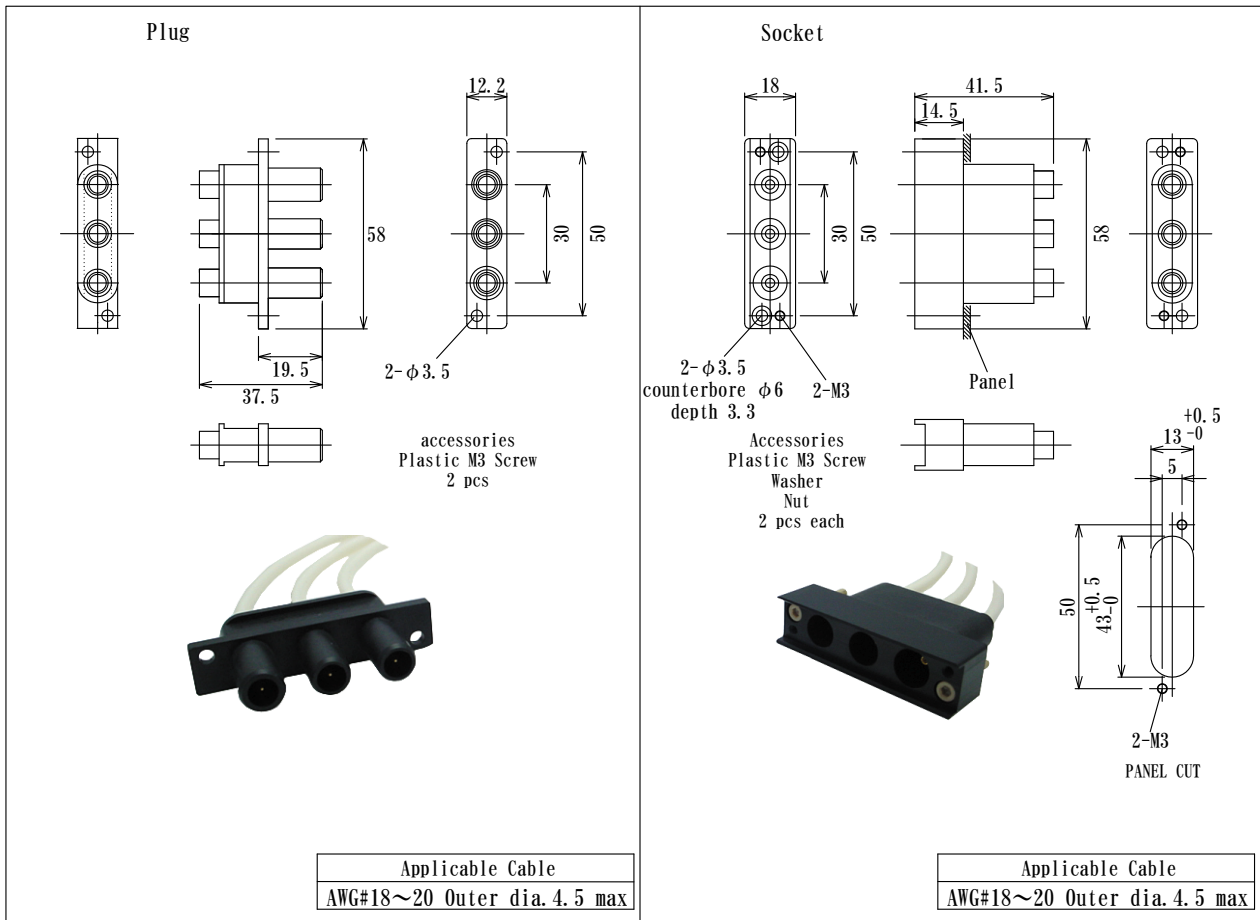

mm



How to order

HAY-S-3P-15 - □□□□

Length mm

Connector P/N

Plug : HAY-P-3P-15
Socket : HAY-S-3P-15

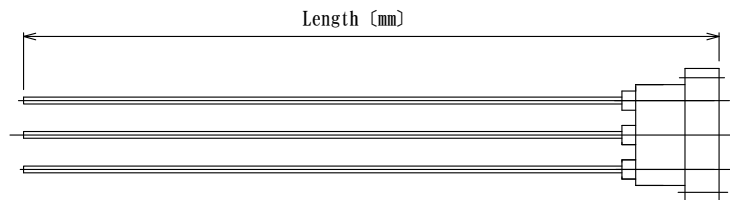

3 Pole Connector

Voltage rating AC7.5KV

* machined housing


* Please contact us if you need customization in terms.

Specification

Current rating: 1.5A
Dielectric Strength: AC15KV 1 minute at sea level
Insulation Resistance: DC1000V 100MΩ min
Contact Resistance: 15mΩ max
Temperature range: -10°C ~ +80°C

Material

Insulator: Unilate, glass filled, Black
Plug pin: Brass, Gold plating over Ni Plating
Socket pin: Beryllium Copper, Heat treated
Gold Plated over Ni plating
Sleeve: Brass, Gold Plating over Ni plating

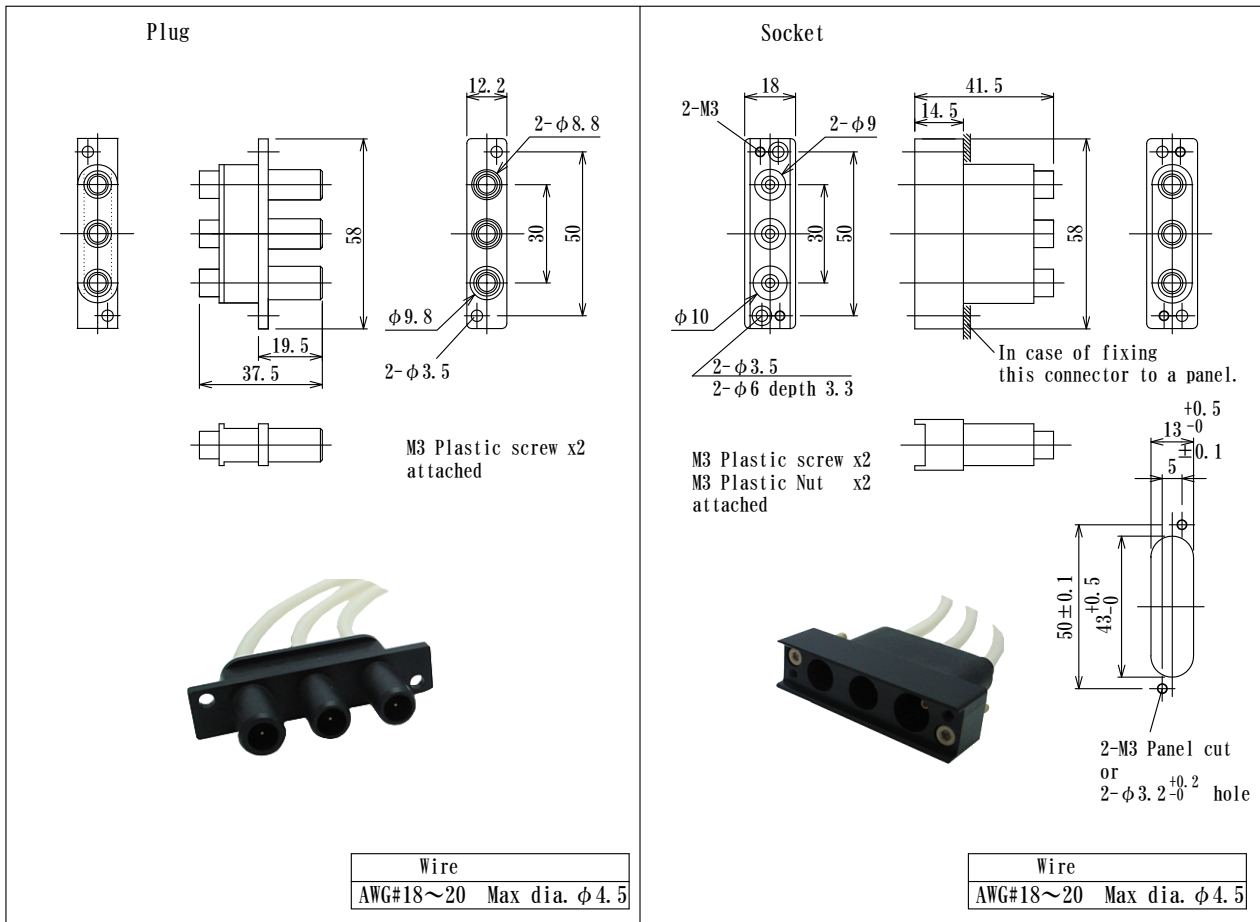

mm

How to order

Please order as cable assemblies.

HAY-S-3P-15 - □□□□

Length [mm]

Plug : HAY-P-3P-15
Socket : HAY-S-3P-15

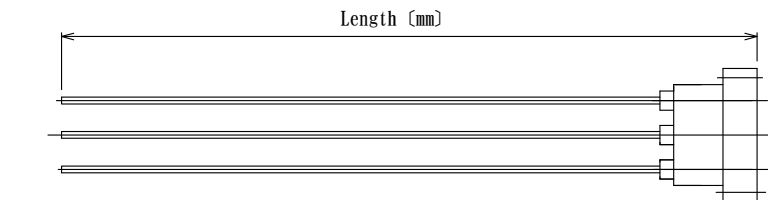


Figure of mating

