

High Current probe pin

Specifications

Pre load : 1.25N/127gf
Load : 2.52N/257gf at 4.0mm travel
Full travel : 6.0mm
Working travel : 4.0mm

Materials

Barrel : Copper alloy
Plunger : Beryllium copper
Coil spring : Stainless steel
Ball : Steel, Ni plating
Receptacle : Copper alloy




Tip type

CRN	SPH
Multipoint Crown	Spherical
20A max	20A max

88YH-F234-L335-CRN

Plunger
Tip type (see table left)
CRN SPH

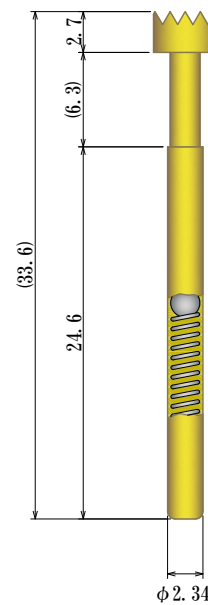

Receptacle

88YH-F234-L305-SKT

