




Acceptable Plug  $\phi 0.60 \sim \phi 0.38\text{mm}$  , Socket Pins

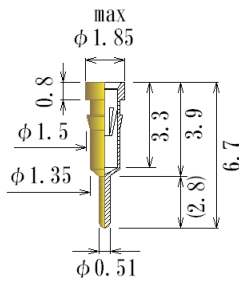


**J0010-GG**  
(J-01contact)



**J0010-GG-JV11**  
(JV11contact, value type)




**J0010-GG-634**  
(J-634contact, High force)




**J0010-GG-856**  
(J-856contact, Low force, Six fingers)  
Make to Order


Make to Order




**J0010-GG-ST**  
(Value type)




**JSC0021-GG**



**JOKP50-GG**




(J-01)



**JL0020-GG**


(J-01)



**JLL0020-L-GG**


(J-03)

Low Force



**JLL0021-GG**



(J-01)




**JL74X11.4-L-GG**

Low Force

(J-03)




**JS0020-GG**




**JS0020-GG-ST**  
(JV11contact, value type)

Make to Order



**JS0020-GG-634**  
(J-634contact, High force)

Make to Order



**JS0020-GG-856**  
(J-856contact, Low force, Six fingers)  
Make to Order

Acceptable Plug  $\phi 0.60 \sim \phi 0.38\text{mm}$  , Socket Pins

		<p>Thru Hole Socket Pin</p>					
<p><b>JSV0020-GG</b></p>	<p><b>J021-GG</b></p>	<p>(J-01)</p>			<p><b>JSP0020-GG</b></p>	<p><b>JSP0021-GG</b></p>	<p>(J-01)</p>

Thru Hole Socket Pin with Silicone Seal

Silicone Seal

How to use

Soldering


PC Board

Lead penetratable

**JSP0020-GG-SB**


(J-01)

Acceptable Plug  $\phi 0.60 \sim \phi 0.35\text{mm}$  , Socket Pins

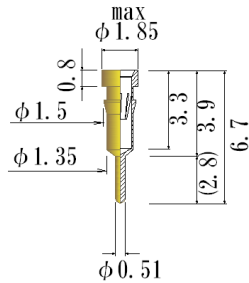


Acceptable plug:  
 $\phi 0.60 \sim \phi 0.40$   
**J0010-L-GG**

Low Force



Acceptable plug:  
 $\phi 0.60 \sim \phi 0.40$   
**JS0041-1L-GG**


Low Force

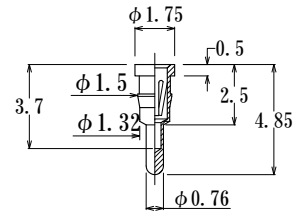

Acceptable plug:  
 $\phi 0.60 \sim \phi 0.40$   
**JS0041B-GG**

(J-03)


(J-01)




Parts Number	L Length
<b>JH0060-GG</b>	6.0
<b>JH0080-GG</b>	8.0
<b>JH0102-GG</b>	10.2
<b>JH0120-GG</b>	12.0
<b>JH0150-GG</b>	15.0

Acceptable Plug Range:  $\phi 0.60 \sim \phi 0.35$

(J-01)

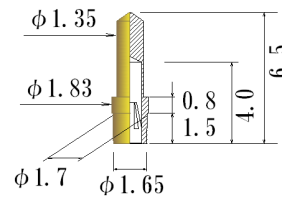


How to use




(J-01)


Acceptable Plug  $\phi 0.60 \sim \phi 0.35\text{mm}$ , Socket Pins

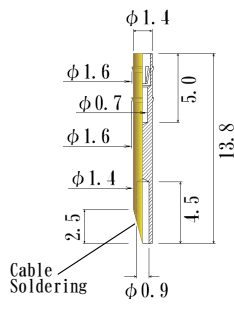


**J1-0510TL-GG**

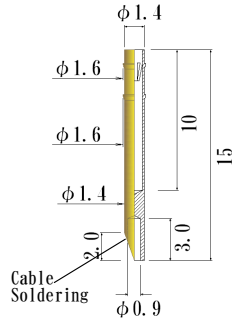

**J1-0620CH-GG**

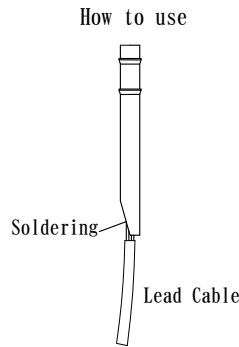


(J-01)




**JN0020-GG**

(J-01)




**J0137-L-GG**

Low Force  
(J-03)




Acceptable plug:  
 $\phi 0.60 \sim \phi 0.40$   
**JS0062-L-GG**


Low Force  
(J-03)

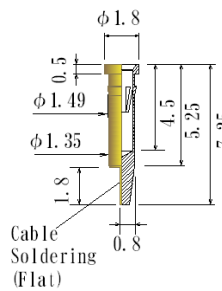

**JSC0030-GG**




**NSB11V-GG**




**NSB10V-GG**

(J-01)




**J051-GG**

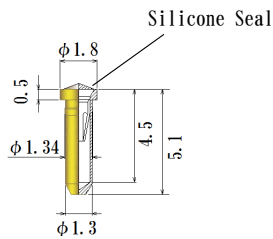


**J051-SGG**

Silicone Seal

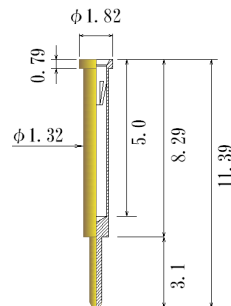

**J1139LAN-GG**



(J-01)

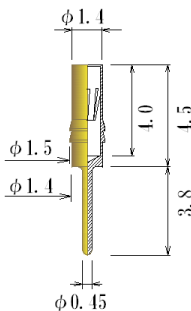

**JZ0010-L-GG**

Low Force

(J-03)

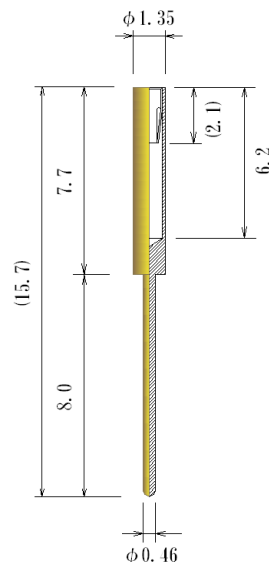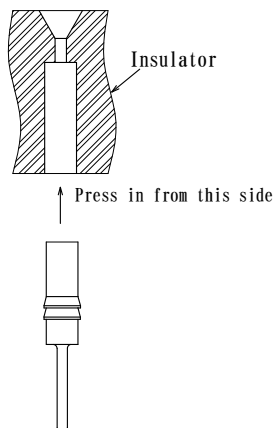

**JS135KM-GG**

(J-03)